


# ORABOND®

ENGINEERED TO PERFORM BETTER

## DOUBLE SIDED TAPES

FOR THE TOUGHEST SIGN AND  
DISPLAY APPLICATIONS



# SIGNAGE WOW

EURO PRICE LIST



# WHY CHOOSE ORABOND® DOUBLE-SIDED TAPES?

- **Incredibly Strong:** Engineered to perform better™ for the toughest signmaking jobs.
- **Versatile Formats:** Available in rolls, spools, and more.
- **Adhesive Options:**
  - **Solvent-based Pure Acrylic (PA):** For the highest performance under stipulated conditions.
  - **Solvent-based Modified Acrylic (MA):** For high to very high performance and versatility.
  - **Synthetic Rubber (SR):** For medium to high performance under stipulated conditions.
  - **Dispersion or Water-based Acrylics (DA):** For a more economical option.

Orafol is one of Europe's largest manufacturers of adhesive tapes, and at Signage Wow, we stock the largest range of Orafol products in Ireland. Our double-sided tapes are designed to meet the highest standards, ensuring your projects are completed with the best quality materials available.








UHB EXCEPTIONAL FEATURES:

-  **High Performance Bonding and Mounting:**  
ORABOND® UHB is perfect for superior bonding and mounting applications. Its advanced acrylic foam adhesive ensures a durable and long-lasting connection, making it ideal when bonding various dissimilar substrates.
-  **Versatility in Substrate Bonding:**  
These tapes excel in bonding both uneven and smooth surfaces, providing a versatile solution for a wide range of applications. Whether you are dealing with irregular contours or flat panels, this adhesive tape has you covered.
-  **Thermal Expansion and Temperature Fluctuation Resistance:**  
ORABOND® UHB adhesive tapes are the go-to choice for bonding different substrate types where thermal expansion or varying temperature fluctuations are a concern. It maintains its integrity even under extreme conditions.
-  **Extreme Resistance:**  
This adhesive tape is a powerhouse when it comes to resistance. It boasts exceptional UV resistance, making it perfect for outdoor applications. Additionally, it can withstand temperature fluctuations, chemicals, solvents, and humidity, ensuring a reliable bond in any environment.
-  **Peel and Shear Strength:**  
Recognized as an industry leader, ORABOND® UHB adhesive tapes excel in both peel and sheer strength. Its high-performance capabilities make it a trusted choice for demanding applications that require a robust bond.
-  **Convenient Roll Length:**  
Convenience meets efficiency with a 33 M roll length. ORABOND® UHB ensures that you have ample tape to complete your projects, reducing the need for frequent replacements.



**SIGNAGE  
WOW**



ORABOND<sup>®</sup>

THE CLEAR CHOICE FOR  
BONDING TRANSPARENT  
GLASS AND PLASTICS

ORABOND<sup>®</sup>

UHB03100T TRANSPARENT

This tape consists of a high-performance acrylic adhesive with high shear strength, high temperature resistance, high transparency and excellent UV stability. Clear adhesive improves bond line aesthetics when joining transparent materials. Ideal bonding solution for glass, clear plastics and safety glass applications and light boxes.

SPECIFICATIONS

APPLICATIONS

THICKNESS WITHOUT LINER

ADHESIVE

RELEASE LINER

AVAILABLE LENGTHS

AVAILABLE WIDTHS

INTERIOR OR EXTERIOR USE


ORABOND™ UHB03100T Series tape is ideally suited for mounting, bonding and sealing of illuminated displays, signage, laminated safety glass, clear plastics like polycarbonate and acrylic and glass displays. Works great with most plastic sheets (PP, PS, PC, ABS,PET AND PVC), metal, glass and powder coated surfaces.

1016 micron  
Foamed acrylic clear  
130 mic release coated polyethylene, red  
33 mtr  
12 mm, 19 mm, 25 mm  
Interior and exterior

WIDTH    LENGTH    PRICE

12 mm	33 mtr	
19 mm	33 mtr	
25 mm	33 mtr	

\* Equivalent tapes from other manufacturers:  
3M VHB 4910

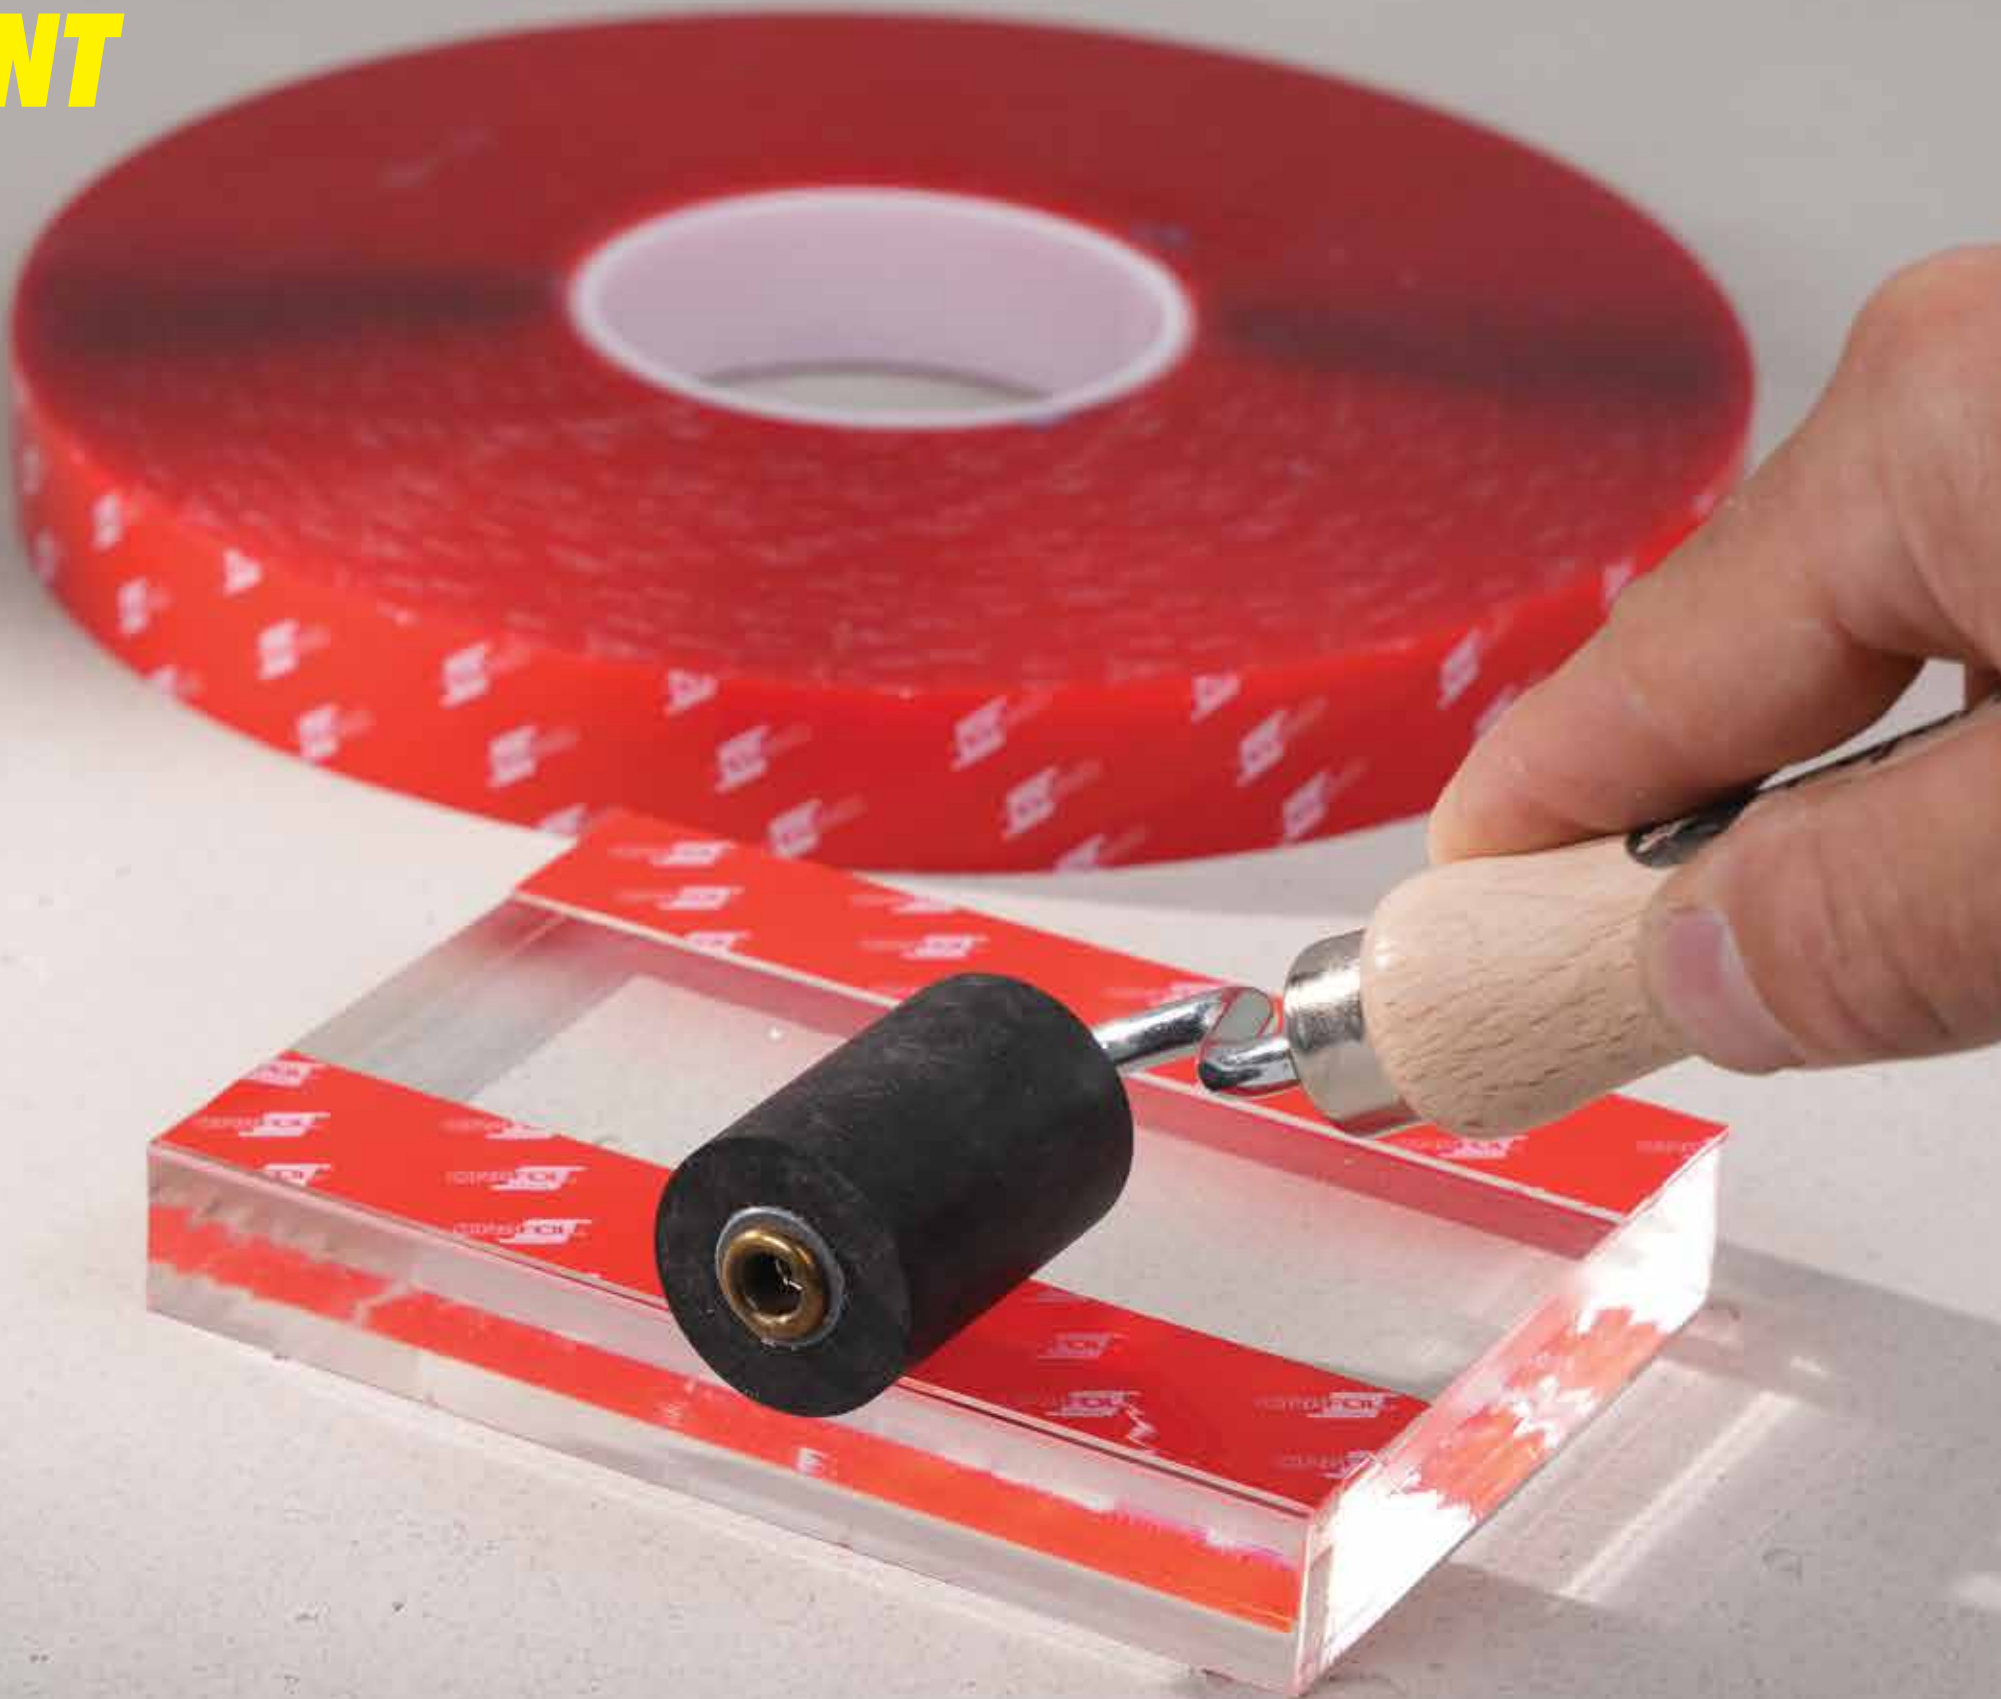



**ORABOND®**  
**UHB03110G GREY ADHESIVE**

In the dynamic world of industrial adhesives, precision and reliability are paramount. Manufactured and converted by industry leader, ORAFOL - this Ultra High Bond Acrylic Foam Adhesive Tape is engineered to meet and exceed the demanding requirements of various applications. It's an essential foam tape as it offers a high performance over several applications. Ideal for permanent fixing of external and internal signage applications.

- Ideal for road traffic signage applications and large panel signs.
- Fix individual letter signs from metal, plastic, foam pvc, sealed wood and many other surfaces.
- Bond panels to framework, metal or plastic sheet to metal frames.
- Achieve excellent results when bonding glass screens or powder painted surfaces.

SPECIFICATIONS	
APPLICATIONS	ORABOND™ UHB03110G Series tape is ideally suited for structural and general bonding including road signs, emblems, external signs fabricated painted metal, illuminated displays and signage. Works great with most plastic sheets (PP, PS, PC, ABS, PET AND PVC), metal, glass, and powder coated surfaces.
THICKNESS WITHOUT LINER	1000 micron
ADHESIVE	Foamed acrylic gray
RELEASE LINER	130 mic release coated polyethylene, red
AVAILABLE LENGTHS	33 mtr
AVAILABLE WIDTHS	12 mm, 19 mm, 25 mm
INTERIOR OR EXTERIOR USE	Interior and exterior

WIDTH	LENGTH	PRICE
12 mm	33 mtr	
19 mm	33 mtr	
25 mm	33 mtr	

\* Equivalent tapes from other manufacturers:  
3M VHB 4941F  
3M RP45

**ORABOND®**  
**THE ULTRA HIGH BOND TAPE**  
**FOR THE MOST DEMANDING**  
**SIGNAGE JOBS**



**ORABOND®**  
**UHB03110W WHITE ADHESIVE**

In the dynamic world of industrial adhesives, precision and reliability are paramount. Manufactured and converted by industry leader, ORAFOL - this Ultra High Bond Acrylic Foam Adhesive Tape is engineered to meet and exceed the demanding requirements of various applications. It's an essential foam tape as it offers a high performance over several applications, ideal for permanent fixing of external and internal signage applications.

- Ideal for signage applications and large panel signs.
- Fix individual letter signs cut from metal, plastic, foam pvc, sealed wood and many other surfaces.
- Bond panels to framework, metal or plastic sheet to metal frames.
- Achieve excellent results when bonding glass screens or powder painted surfaces.

SPECIFICATIONS		
ORABOND™ UHB03110W Series tape is ideally suited for structural and general bonding including signage, emblems, window glazing bars, illuminated displays and signage. Works great with most plastic sheets (PP, PS, PC, ABS, PET AND PVC), metal, glass, and powder coated surfaces.		
APPLICATIONS		
THICKNESS WITHOUT LINER	1000 micron	
ADHESIVE	Foamed acrylic white	
RELEASE LINER	130 mic release coated polyethylene, red	
AVAILABLE LENGTHS	33 mtr	
AVAILABLE WIDTHS	12 mm, 19 mm, 25 mm	
INTERIOR OR EXTERIOR USE	Interior and exterior	
WIDTH	LENGTH	PRICE
12 mm	33 mtr	
19 mm	33 mtr	
25 mm	33 mtr	

\* Equivalent tapes from other manufacturers:  
3M VHB 4613

**ORABOND®**  
**THE ULTIMATE BONDING TAPE**







1811 DOUBLE-SIDED TAPE

ORABOND® 1811 Is a tape that consists of a white, closed-cell polyethylene foam coated on both sides with a modified solvent acrylate adhesive and offers a high initial adhesion even on rough and difficult substrates.

ORABOND® 1811 is ideal for use as an adhesive medium for hooks, signs, handles and dispensers and is Ideal for use in exhibition and conference fit-outs.

SPECIFICATIONS		
APPLICATIONS		ORABOND™ 1811 is the ideal tape for everyday bonding applications in signage, shop fitting and point of sale, it's a 1mm thick tape, works great with most plastic sheets (PP, PS, PC, ABS, PET AND PVC), metal, glass, paper and board and powder coated surfaces. Recommended for smooth surfaces.
THICKNESS WITHOUT LINER		1000 micron
ADHESIVE		Pressure activated, permanent, modified solvent-acrylic adhesive on both sides.
RELEASE LINER		blue silicone paper
AVAILABLE LENGTHS		50 mtr
AVAILABLE WIDTHS		12 mm, 19 mm, 25 mm
INTERIOR OR EXTERIOR USE		Interior
WIDTH	LENGTH	PRICE
12 mm	50 mtr	
19 mm	50 mtr	
25 mm	50 mtr	

\* Equivalent tapes from other manufacturers: 3M VHB 9546



1819 DOUBLE-SIDED TAPE

ORABOND® 1819 Is a tape that consists of a white, closed-cell polyethylene foam coated on both sides with a modified solvent acrylate adhesive and offers a high initial adhesion even on rough and difficult substrates.The tape is 2mm thick.

ORABOND® 1819 is ideal for use as an adhesive medium for hooks, signs, handles and dispensers and is Ideal for use in exhibition and conference fit-outs, shopfitting and POS Displays.

SPECIFICATIONS			
APPLICATIONS			ORABOND™ 1819 is the ideal tape for everyday bonding applications in signage ,shop fitting and point of sale, it's a 2mm thick tape, works great with most plastic sheets (PP, PS, PC, ABS, PET AND PVC), metal, glass, paper and board and powder coated surfaces. Recommended for smooth surfaces.
THICKNESS WITHOUT LINER			2000 micron
ADHESIVE			PRESSURE ACTIVATED, permanent , Modified solvent-acrylic adhesive on both sides.
RELEASE LINER			Blue silicone paper
AVAILABLE LENGTHS			50 mtr
AVAILABLE WIDTHS			12 mm, 19 mm, 25 mm
INTERIOR OR EXTERIOR USE			Interior
WIDTH	LENGTH	PRICE	
12 mm	33 mtr		
19 mm	33 mtr		
25 mm	33 mtr		

\* Equivalent tapes from other manufacturers: 3M VHB 4965

\* Equivalent tapes from other manufacturers: 3M VHB 4965







1334

Introducing Orabond 1334, the revolutionary double-sided tape designed for versatility and convenience. This innovative tape features a polyester film carrier layered with acrylate adhesives of varying strengths on each side.

- Permanent Adhesive Side: This side adheres firmly to your signs or displays, boasting high temperature resistance, strong adhesive strength, high tack, and excellent moisture resistance.
- Removable Adhesive Side: The covered side is designed for easy application to walls or displays, allowing for residue-free removal without leaving any messy adhesive behind.
- Orabond 1334 is perfect for all signage, display and Point of sale applications, ensuring a secure bond while offering the flexibility of easy removal when needed.

SPECIFICATIONS	
APPLICATIONS	Ideal for POS DISPLAYS, outdoor signs, works great with most plastic sheets (PP, PS, PC, ABS, PET AND PVC), metal, glass, paper and board, anywhere you need good residue free removal.
THICKNESS WITHOUT LINER	1000 micron
ADHESIVE	Open side; Modified solvent acrylic permanent Closed side; Modified solvent acrylic removeable.
RELEASE LINER	Double-sided siliconised paper (90 g/m <sup>2</sup> yellow)
AVAILABLE LENGTHS	50 Mtr
AVAILABLE WIDTHS	25 mm

WIDTH	LENGTH	PRICE
25 mm	50 mtr	


THE ULTIMATE  
DOUBLE-SIDED TAPE  
FOR EASY, MESS-  
FREE REMOVAL



THE COVERED SIDE IS DESIGNED FOR EASY APPLICATION TO WALLS OR DISPLAYS, ALLOWING FOR RESIDUE-FREE REMOVAL



THIS SIDE ADHERES FIRMLY TO YOUR SIGNS OR DISPLAYS, BOASTING HIGH TEMPERATURE RESISTANCE, STRONG ADHESIVE STRENGTH

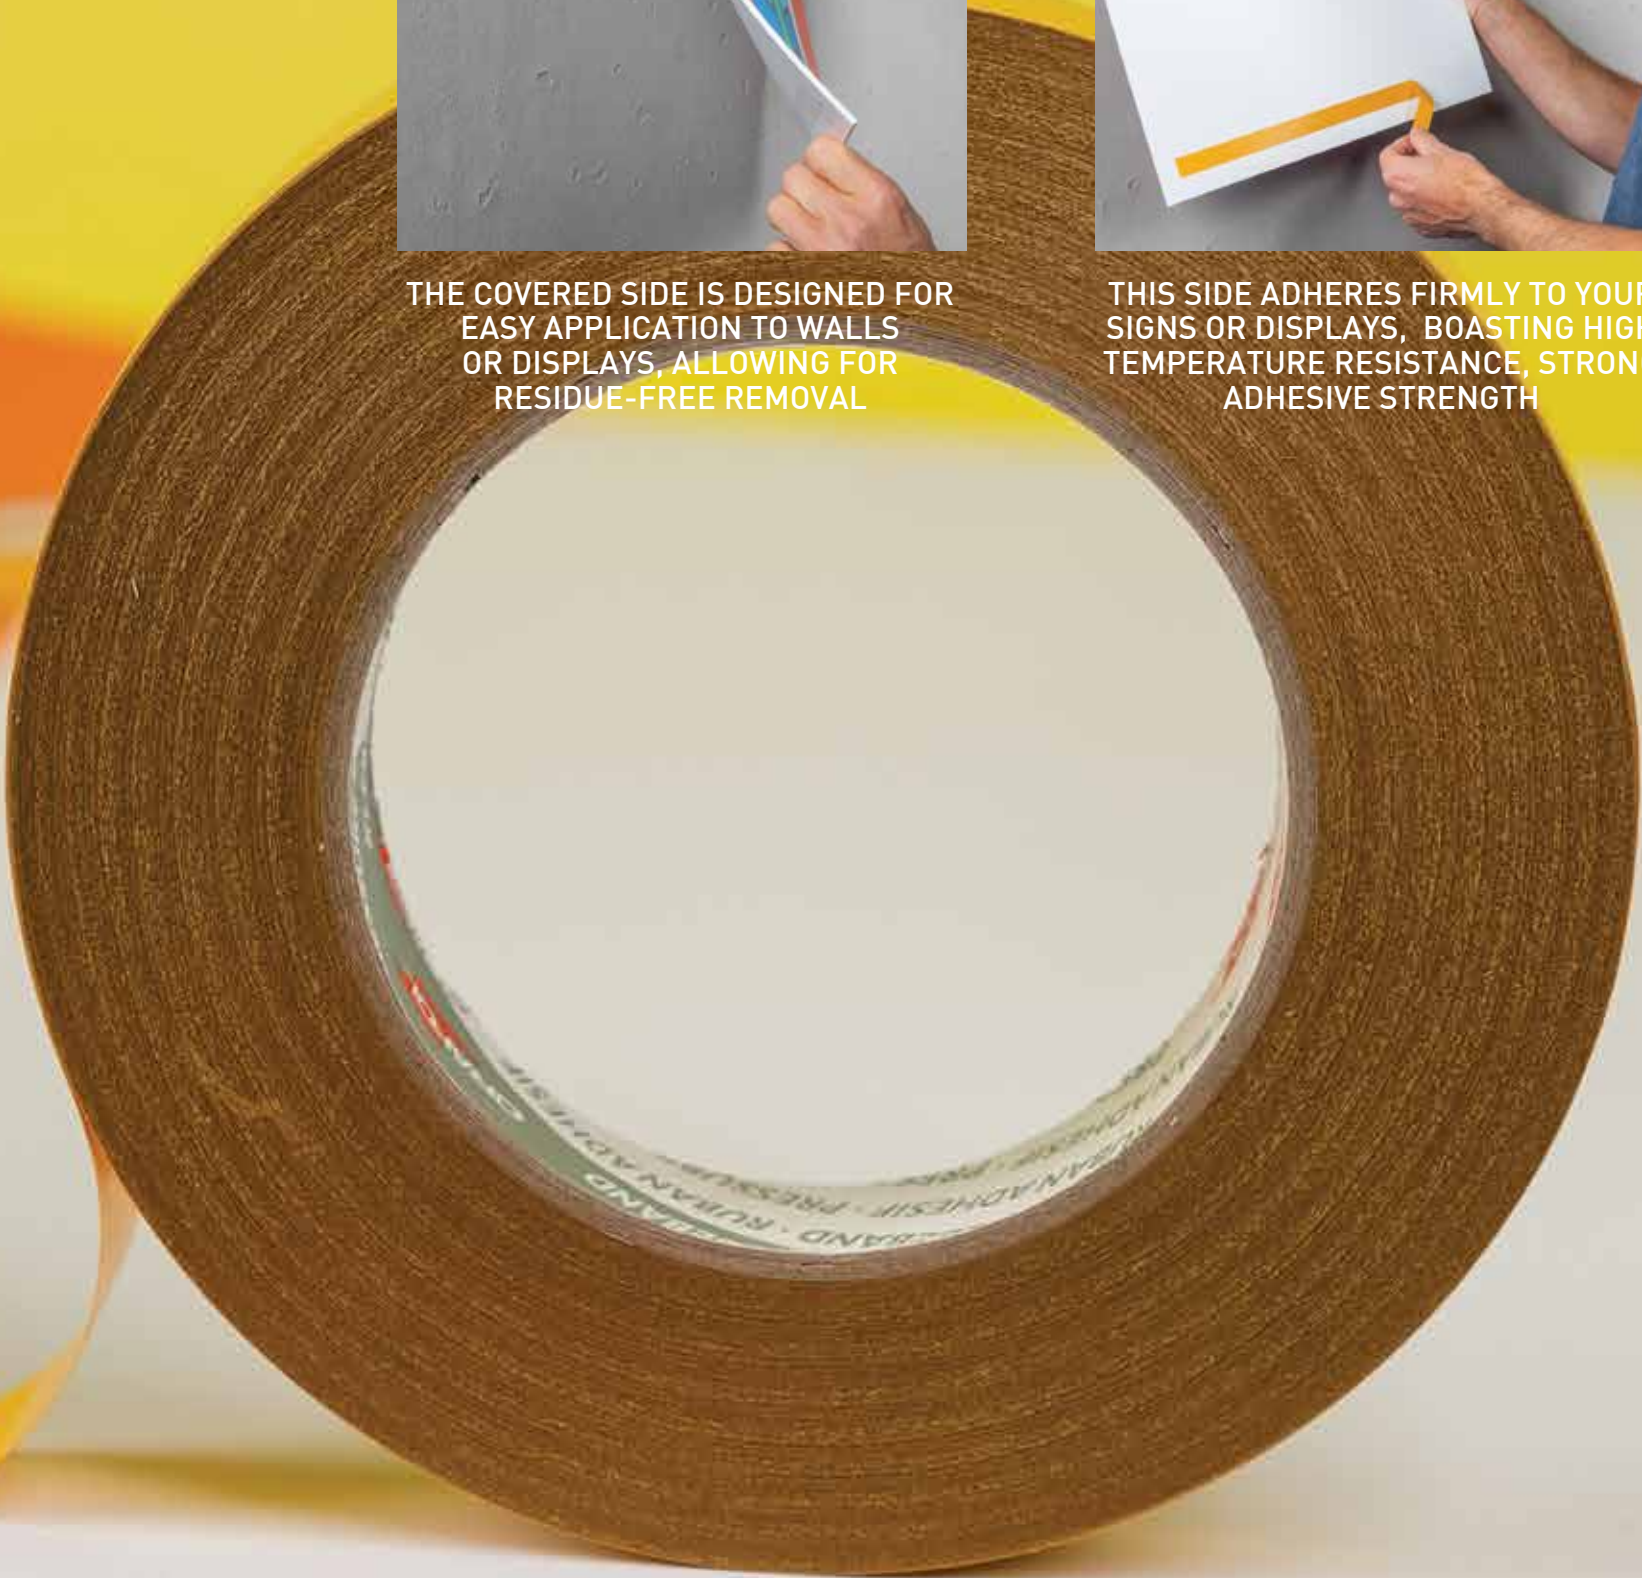



ORABOND®

1397PP DOUBLE-SIDED TAPE

ORABOND® 1397PP is a double-sided tape that consists of a polyester film carrier, layered on both sides with a modified solvent acrylate adhesive. It has a very good resistance against UV radiation, extreme temperatures, chemicals, solvents and humidity. Its highly shear-resistant adhesive has an excellent durability when attached to metal, varnish and high energy surfaces and has a good adhesive durability when attached to low energy surfaces.

SPECIFICATIONS		WIDTH	LENGTH	PRICE
APPLICATIONS	1397PP is ideal for POS DISPLAYS, outdoor signs and banners. Number 1 choice for hemming banners. Works great with most plastic sheets (PP, PS, PC, ABS, PET AND PVC), metal, glass, paper and board and powder coated surfaces where high shear strength and adhesion are required. A high performance great value product.	12 mm	50 mtr	
		19 mm	50 mtr	
		25 mm	50 mtr	
		* Equivalent tapes from other manufacturers: 3M 9088FL		
THICKNESS WITHOUT LINER	210 micron			
ADHESIVE	Modified solvent acrylic clear			
RELEASE LINER	PP film, red			
AVAILABLE LENGTHS	50 mtr			
AVAILABLE WIDTHS	12 mm, 19 mm, 25 mm			
INTERIOR OR EXTERIOR USE	Interior and exterior			



A MUST HAVE IN EVERY SIGN SHOP





**ORABOND®**  
**1399TM**

When you need a tape for those rough surfaces look no further that Orabond 1399TM.


- Superior high tack.
- Aggressive bond strength.
- Long lasting, durable bond solutions.
- Excellent high temperature shear resistance.
- Aggressive bond to low surface energy materials.
- Plasticiser resistant.
- Good environmental and UV resistance.

WIDTH	LENGTH	PRICE
12 mm	50 mtr	
19 mm	50 mtr	
25 mm	50 mtr	

SPECIFICATIONS	
APPLICATIONS	Ideal for POS signage, outdoor signs and banners, works great with most plastic sheets (PP, PS, PC, ABS, PET AND PVC), metal, glass,paper and board and powder coated surfaces
THICKNESS WITHOUT LINER	190 micron
ADHESIVE	Modified solvent-acrylate adhesive on both sides (total thickness 190 micron)
RELEASE LINER	White silicone-coated paper
AVAILABLE LENGTHS	50 mtr
AVAILABLE WIDTHS	12 mm, 19 mm, 25 mm
INTERIOR OR EXTERIOR USE	Interior and Exterior

\* Equivalent tapes from other manufacturers: 3M 9086 / TESA 4962

HIGH PERFORMANCE  
DOUBLE COATED TISSUE  
TAPE FOR ROUGH SURFACES.  
HIGH PERFORMANCE  
EVERYTIME.

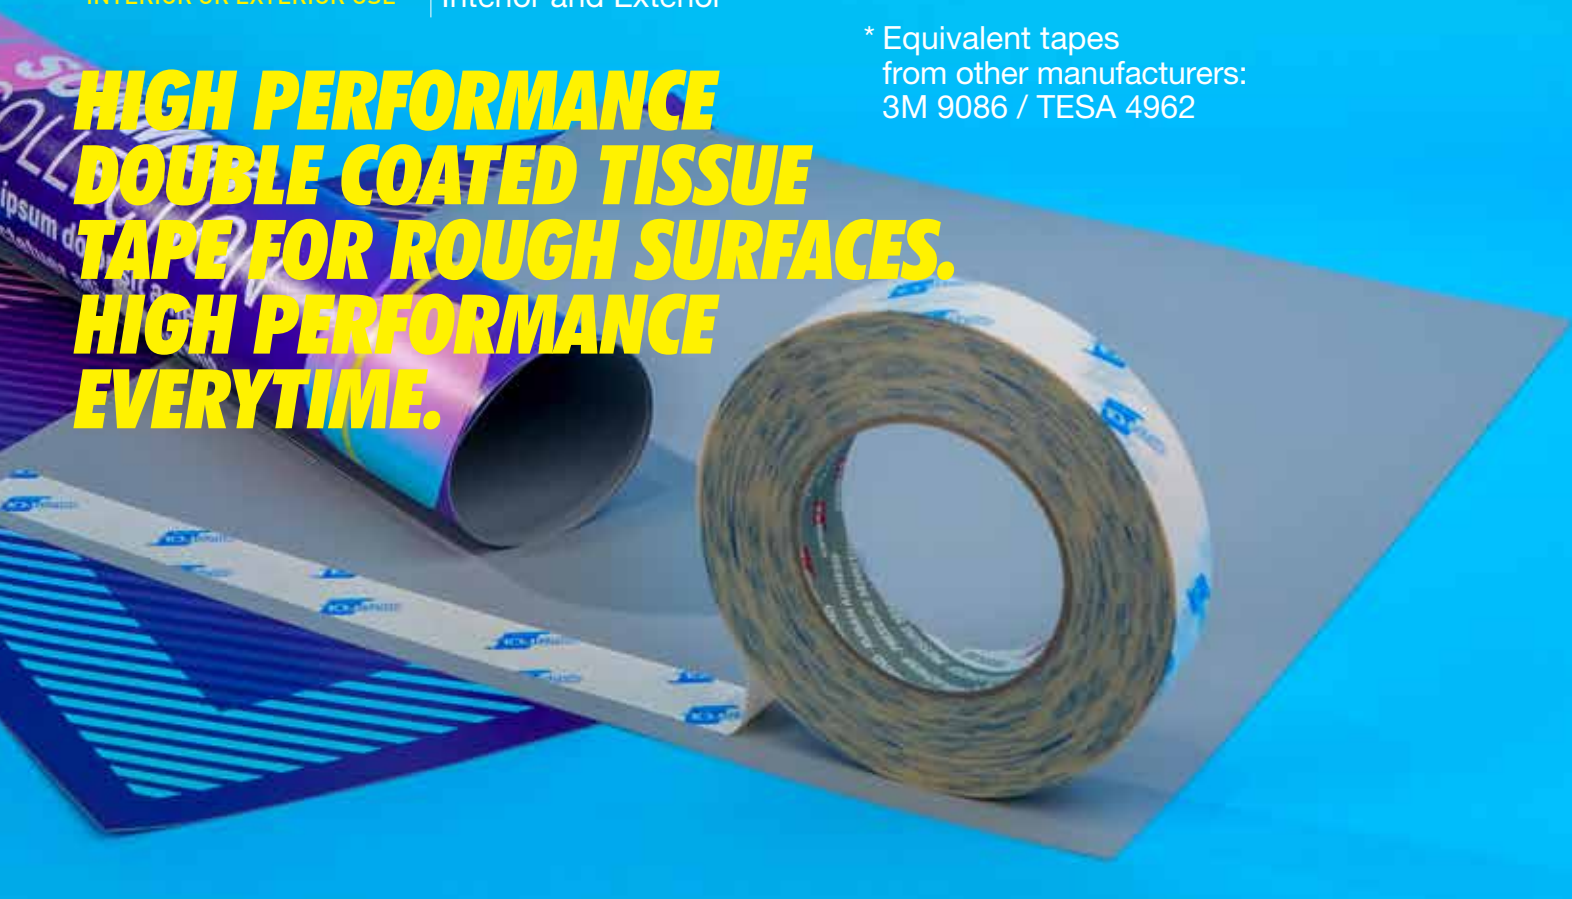

**ORABOND®**  
**1459 HI TACK**

HIGH TACK RUBBER COATED DOUBLE SIDED TAPE

This double-sided tape consists of a paper tissue carrier, layered on both sides with a rubber adhesive. This adhesive has excellent bonding characteristics. It is lined with a double-sided silicone paper. The used adhesive SAR5 meets the demands of the Code of Federal Regulations, Food and Drugs (FDA), 21 CFR Ch. I, 175.105.

AREA OF USE:

Splicing of paper, cardboard, PE coated materials, textiles, plastic, metal films rough and fibrous substrates or foams, ideal for paper and board displays, point of sale applications, sample cards, poster fixing and bag seals.

SPECIFICATIONS	
APPLICATIONS	ORABOND 1459 hi tack series tape is ideally suited for mounting, bonding and sealing fibrous boards, posters, point of sale displays, sample cards and poster fixing and works great on textiles.
THICKNESS WITHOUT LINER	140 micron
ADHESIVE	Synthetic rubber
RELEASE LINER	Paper, brown
AVAILABLE LENGTHS	50 mtr
AVAILABLE WIDTHS	12 mm, 19 mm, 25 mm, 100 mm
INTERIOR OR EXTERIOR USE	Interior

WIDTH	LENGTH	PRICE
12 mm	50 mtr	
19 mm	50 mtr	
25 mm	50 mtr	
50 mm	50 mtr	
100 mm	50 mtr	

\* Equivalent tapes from other manufacturers: TESA 51571







1375 TRANSFER TAPE

HIGH PERFORMANCE 60 MICRON ACRYLIC TRANSFER TAPE

Orabond 1375 transfer tape is a high performing transfer tape mainly used in the production of nameplates and decals. Offers excellent moisture, solvent, and UV and temperature resistance. This tape is made of a high performance acrylic adhesive on polycoated kraft liner. It gives a thin conformable bond line and outstanding adhesion to metal and high surface energy plastics. It's also ideal for graphic and nameplate attachment, and is easy to die-cut and process.

SPECIFICATIONS	
APPLICATIONS	ORABOND 1375 transfer tape is ideally suited for laminating, mounting, bonding of metal and polycarbonate nameplates and membrane, Resistant to UV radiation, temperature, chemicals, solvents, humidity For lamination of smooth or lightly porous parts.
THICKNESS WITHOUT LINER	60 micron
ADHESIVE	Synthetic rubber
RELEASE LINER	PE Paper brown
AVAILABLE LENGTHS	50 mtr
AVAILABLE WIDTHS	305 mm, 610 mm, 1220 mm
INTERIOR OR EXTERIOR USE	Interior and Exterior

WIDTH	LENGTH	PRICE
305 mm	50 mtr	* Equivalent tapes from other manufacturers: 3M 467
610 mm	50 mtr	
1220 mm	50 mtr	

FOR THE PRODUCTION  
OF METAL AND  
POLYCARBONATE  
NAMEPLATES AND  
DECALS







1377 TRANSFER TAPE

HIGH PERFORMANCE 120 MICRON ACRYLIC TRANSFER TAPE

Orabond 1377 transfer tape is a high performing transfer tape mainly used in the production of nameplates and decals, offers excellent moisture, solvent, and UV and temperature resistance. This tape is made of a high performance acrylic adhesive on polycoated kraft liner. It gives a thin conformable bond line and outstanding adhesion to metal and high surface energy plastics. It’s also ideal for graphic and nameplate attachment, and is easy to die-cut and process.

SPECIFICATIONS	
APPLICATIONS	ORABOND 1377 transfer tape is ideally suited for laminating, mounting, bonding of metal and polycarbonate nameplates and membrane, Resistant to UV radiation, temperature, chemicals, solvents, humidity For lamination of smooth or lightly porous parts.
THICKNESS WITHOUT LINER	120 micron
ADHESIVE	Synthetic rubber
RELEASE LINER	PE Paper brown
AVAILABLE LENGTHS	50 mtr
AVAILABLE WIDTHS	305 mm, 610 mm, 1220 mm
INTERIOR OR EXTERIOR USE	Interior and Exterior

WIDTH	LENGTH	PRICE
305 mm	50 mtr	
610 mm	50 mtr	
1220 mm	50 mtr	

\* Equivalent tapes from other manufacturers: 3M 468

FOR THE PRODUCTION OF METAL AND POLYCARBONATE NAMEPLATES AND DECALS







VELCRO

Velcro is a brand name of fabric hook-and-loop fasteners. It consists of two layers: a ‘hook’ side, which is a piece of fabric covered with tiny hooks, and a ‘loop’ side, which is covered with even smaller and ‘hairier’ loops. When the two sides are pressed together, the hooks catch in the loops and hold the pieces together. When the layers are separated, the strips make a characteristic ‘ripping’ sound. Available in two colours, white and black, in strips or dots.

SIZE VELCRO DOTS LOOP	PRICE
22mm Diameter x 1000 Black	
22mm Diameter x 1000 White	
SIZE VELCRO DOTS HOOK	PRICE
22mm Diameter x 1000 Dots Black	
22mm Diameter x 1000 Dots White	
SIZE VELCRO TAPE HOOK	PRICE
25mm x 25m Black	
25mm x 25m White	
SIZE VELCRO TAPE DOTS	PRICE
25mm x 25m Black	
25mm x 25m White	



MAGNETIC TAPE

Ideal for smooth surfaces, the 1.5mm magnet is backed by an acrylic adhesive and can be used for all kinds of fixing and display uses. Recommended for pop-up display stands, A-Boards, sign boards, fridge magnets etc.

SIZE	PRICE
12.7 mm x 30 mtr	
19.05 mm x 30 mtr	
25.4 mm x 30 mtr	

**kip** 3804 MASKING TAPE

**NO. 1 CHOICE FOR PROFESSIONALS.**  
KIP Masking Tapes are produced under strict quality controls from production up until shipment, and are recognised globally for their high standards. 3804 Masking Tape is a lightly creped tape and is the No. 1 choice for today’s professionals, commonly used for easy everyday masking. 3804 is the ideal choice for less demanding covering work on smooth indoor substrates. It has good tear and adhesive strength and is easily tearable by hand.

TECHNICAL DETAILS
CARRIER: CREPE
STRENGTH: 0.14MM
GLUE: NATURAL RUBBER
BONDING STRENGTH STEEL: 3.2N / 10MM

SIZE	PRICE
24mm x 50mtrs	
48mm x 50mtrs	

TECHNICAL DETAILS
TENSILE STRENGTH: 30N / 10MM
ELONGATION AT BREAK: 10%
TEMPERATURE RESISTANCE: 60°C
RELEASE: 24HRS







POWER TAPE® BANNER HEMMING TAPE

Reinforce banner edges with this one sided hemming tape without folding or sewing a hem.

- Duplicates the strength of folded hem and doublesided banner tape but eliminates the hassle.
- Create a perfectly sharp digital banner with no rippled hem.

WIDTH	LENGTH	PRICE
38 mm	33 mtr	



POWER TAP BANNER HEMMING TAPE

POWER TAPE® TIPS

Recommended for outdoor banners more than 8 feet in length.

- Apply light tension to banner for easy application.
- Position 1/8"-1/4" from top and bottom edge to allow for some tape wander.
- PowerTape® may be used along sides of vertical banners to reduce tape curl.



1. TAKE PRINTED BANNER



2. APPLY SINGLE SIDED TAPE



3. INSTALL EYELETS



4. THE PERFECT BANNER - IT'S THAT EASY



TUFF TAPE BANNER HEMMING TAPE

This is the original banner hemming tape designed especially for hemming your own banners. Tuff Tape is double sided and very high tack. It won't let you down.

WIDTH	LENGTH	PRICE
25 mm	33 mtr	



TUFF TAPE BANNER HEMMING TAPE



1. TAKE PRINTED BANNER



2. INSTALL DOUBLE SIDED TAPE



3. FOLD OVER HEM



4. SECURE WITH ROLLER







RODY FAST GLUE

Rody Fast Glue is a high quality 20ml bottle of cyanoacrylate glue for bonding EASYFIX males or GOLIATH sockets to methacrylate, smooth PVC, etc. The most used and absolutely the best instant glue. For smooth and non-porous materials. You must always sand the surface and make it free of grease when gluing. Incorrect processing can result in a wrong result. All adhesives undergo an aging process.

Durability of the adhesive is 3 months after the sale. The glue will last longer if you keep the glue in the refrigerator.

SIZE	PRICE
20 gm Bottle	



RODY POWERBOND  
GLUE GUN BLACK

Rody-Power-Bond gluegun. Allows you to change the glue cartridge in one easy movement and very handy to use.

SIZE	PRICE
For 50 gm Cartridge	



RODY POWERBOND

Rody-Power-Bond 50 ml. METHYL-METHACRYLATE 2 component cartridge 50 g. Specially for use for plastic on metals (including stainless steel and aluminium). Can only be used with an adapter (LOS 2557) or gun (LOS 2554). You must always sand the surface and make it free of grease when gluing. Incorrect processing can result in a wrong result. All adhesives undergo an aging process. Durability of the adhesive is 3 months after the sale. The glue will last longer if you keep the glue in the refrigerator.



SIZE	PRICE
50 gm Cartridge	







**ORABOND®**

**DOUBLE-SIDED  
TAPES ARE DESIGNED TO MEET  
THE HIGHEST STANDARDS,  
ENSURING YOUR PROJECTS  
ARE COMPLETED WITH THE  
BEST QUALITY MATERIALS  
AVAILABLE.**

**ORABOND®**  
ENGINEERED TO PERFORM BETTER







**ADDRESS:** UNIT 7 AIRTON CLOSE,  
TALLAGHT, D24  
**PHONE:** +353 (0) 1 427 5240  
**EMAIL:** [SALES@SIGNAGEWOW.COM](mailto:SALES@SIGNAGEWOW.COM)  
**WEB:** [WWW.SIGNAGEWOW.COM](http://WWW.SIGNAGEWOW.COM)